

# PCBS6918B100P2AC00, Automotive Operation Temperature -40 °C~+125 °C Shunt Based Current Sensing Module

## 1、Characteristics

- Continuous Operating Range: -350A~+350A
- Connector: Horizontal 4 PIN
- High Accuracy Current Measurement
- Real-Time Temperature Measurement
- Applicable to High Pulse Current
- Low TCR, Low Inductance, Low Thermal EMF
- Excellent Long-Term Stability
- Operating Temperature Range: -40°C~125°C

## 2、Applications

- BMS Current Measurement
- BDU/PDU Current Measurement


## 3、Introduction

PCBS6918B100P2AC00 is an automotive current sensing module used to assist in measuring bidirectional DC current. It has high accuracy, low TCR, low inductance, low thermal EMF, and excellent long-term stability and anti-interference ability.

This module is designed based on a low-TCR shunt, which is welded with PCBA and can be installed on the circuit through bolts. It is used to collect bus current and shunt temperature, and send the measured signal to the signal processing side of the user defined module. It can be customized according to the specific technical requirements.

### Module Information

Shunt Size	Hole Diameter	Connector
69mm×18mm	7mm	5023520400

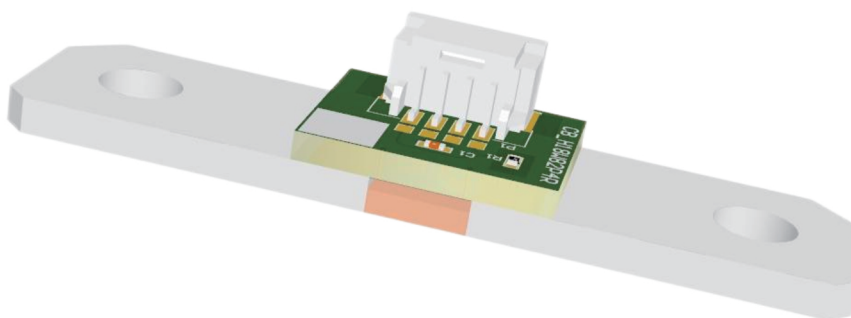

## Content

<b>1.Characteristics</b>	01	<b>8.Mechanical Structure</b>	06
<b>2.Applications</b>	01	8.1 Structural Diagram	06
<b>3.Introduction</b>	01	8.2 Laser QR Code	06
<b>4.Revision</b>	02	8.3 Connector	07
<b>5.Specifications</b>	03	8.4 Connector Definition	07
5.1 Limit Parameters	03	8.5 Diagram of PCB	07
5.2 General Parameters	03	8.6 Copper Bar Connection	07
<b>6.Test Standards</b>	04	<b>9.Storage &amp; Packaging</b>	08
<b>7.Current Data</b>	05	9.1 Storage	08
7.1 Temperature Compensation	05	9.2 Packaging	08
7.2 Current Data Acquisition	05		

## 4、Revision

Date	Note	Revised Content
2023.04.14	/	A0
2023.05.06	Revise the information of data matrix	A1
2023.09.21	Revise the derating curve	A2
2023.12.01	Revise the layout of datasheet	A3


## 5、Specifications

### 5.1 Limit Parameters

Note: Product will affect its reliability and cause unexpected permanent damage if operating under limit parameters for long time.

Parameter	Condition	Min.	Typical	Max.	Unit
Current Measurement Range	$\pm 1000\text{A}$			5	s
Operating Temperature		-40		125	°C
Storage Temperature		-40		125	°C
Humidity				95	%RH

[1] When operating temperature > 120°C, derating power is needed. The specific derating range refers to the figure below.

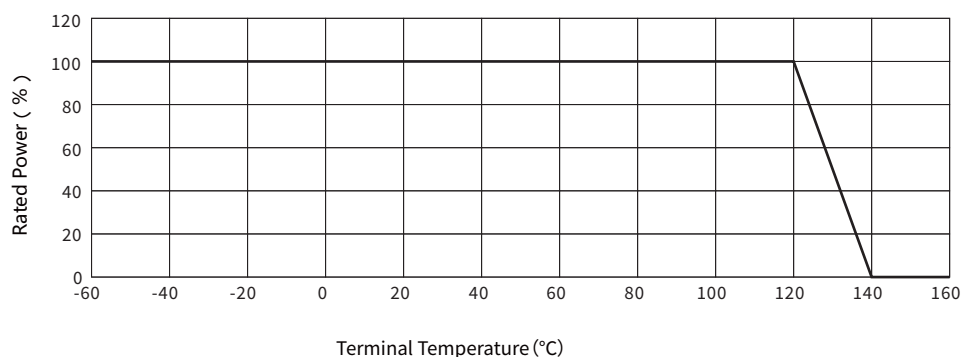

### 5.2 General Parameters

Test Conditions: Ambient Temperature 25°C (Unless Otherwise Noted)

Parameter	Condition	Min.	Typical	Max.	Unit
<b>Shunt</b>					
Resistance			100		$\mu\Omega$
Tolerance			$\pm 5$		%
TCR	-40°C~+125°C		$\pm 100$		ppm/°C
Continuous Operating Current			$\pm 350$		A
Thermal EMF				3	$\mu\text{V}/^\circ\text{C}$
Inductance				5	nH
Operating Temperature Range			-55~+175		°C
<b>NTC</b>					
Resistance			10		k $\Omega$
Tolerance			$\pm 1$		%
TCR	25/85°C		3434		K
Operating Temperature Range			-40~+150		°C
<b>Capacitor</b>					
Capacitance			0.1		$\mu\text{F}$
Tolerance			$\pm 10$		%
Rated Voltage			50		V
Operating Temperature Range			-55~+125		°C

## 6、Test Standards

Test No.	Test Standards	Test Items
<b>General inspection</b>		
1	/	Appearance
2	/	Dimension
3	/	Weight
4	/	Flatness of installation
<b>Electrical loads</b>		
5	VW 80000-2021 5.4.20	E-18 Insulation resistance
6	VW 80000-2021 5.4.22	E-20 Dielectric strength
7	GB/T 6148-2005	Drift of temperature
<b>Climatic loads</b>		
8	GB/T 2423.2-2008	High temperature aging
9	GBT 2423.1-2008	Low-temperature operation
10	VW 80000:2021 5.6.5	K-05 Thermal shock (component)
11	GB/T2423.50-2012 MIL-STD-202 Method 103	Damp heat, constant
12	VW 80000:2021 5.8.3	L-03 Service life test – Temperature cycle durability testing
13	GB/T 10125-2021	Salt spray
<b>Mechanical loads</b>		
14	VW 80000-2021 5.5.1	M-01 Free fall
15	VW 80000-2021 5.5.4	M-04 Vibration test
16	VW 80000-2021 5.5.5	M-05 Mechanical shock
<b>Regulation Validation</b>		
17	RoHS	Pb, Cd, Hg, Cr(V), PBBs, PBDEs
18	REACH	CMR,PBT,vPvB...



## 7、Current Data

### 7.1 Temperature Compensation

PCBS6918B100P2AC00 applies temperature compensation to weaken the impact of ambient temperature changes on the shunt resistance. A fitting algorithm is used to compute a curve of the shunt resistance change with temperature, as shown in Figure 7-1.

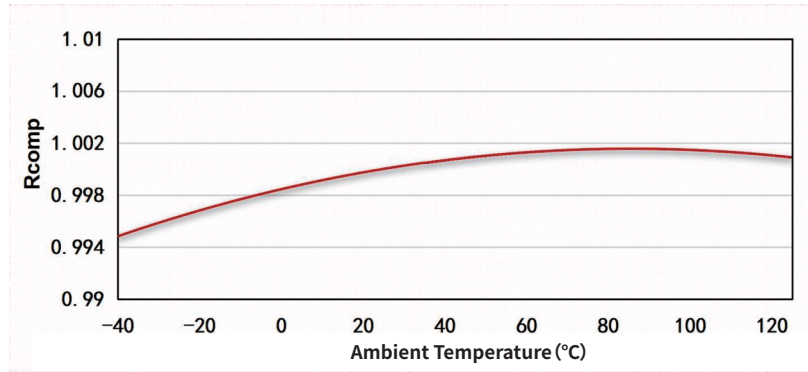


Figure 7-1.  $R_{COMP}$  Temperature Characteristic Curve

As shown in Figure 7-1, the compensation factor  $R_{COMP}$  temperature characteristic curve is:

$$R_{COMP} = A \cdot T^2 + B \cdot T + C$$

Demonstration:

$R_{COMP}$  : The drift of the shunt resistance relative to the change from initial temperature to present temperature, in ppm.

T : Present Temperature of Shunt

A : Coefficient of Quadratic Term  $T^2$

B : Coefficient of Primary Term T

C : Constant Term


Shunt resistance  $R_t$  at present temperature t, through temperature compensation:

$$R_t = R_0 \cdot R_{COMP}^{[1]}$$

[1]  $R_0$  is the initial resistance of shunt at lab environment, usually at  $+25^\circ\text{C} \pm 2^\circ\text{C}$

[2] Figure 7-1 is only for illustration of this product. It is not the temperature characteristic curve for all products.

### 7.2 Current Data Acquisition

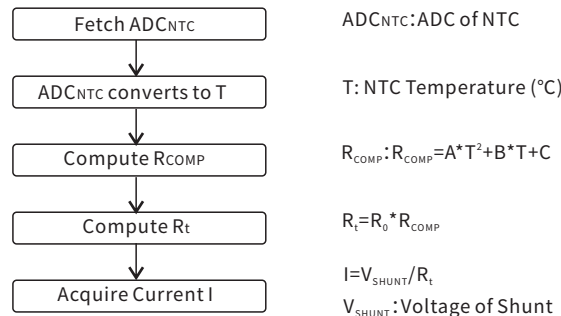

## 8、Mechanical Structure

### 8.1 D dimensions

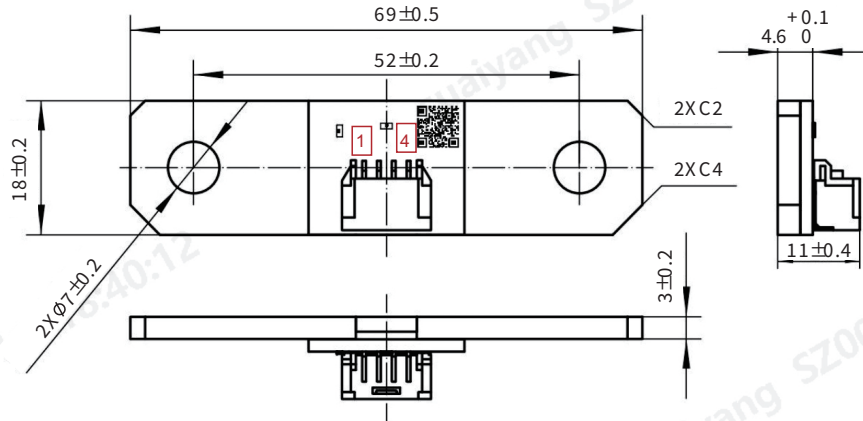


Figure 8.1 Structure Diagram

### 8.2 Laser QR Code

#### 8.2.1 Code Size

No.	Materials	Size L*W(mm)
1	PCB Cover Size	6*6
2	Data Matrix Size	5*5

#### 8.2.2 Data Matrix

The content of the QR code includes date, serial number, and the actual resistance value

(Take 100  $\mu\Omega$  for example, measurement is to three decimal places: 100.000  $\mu\Omega$ , output as R100000n, if it is 99.000  $\mu\Omega$  is R99000n)

Content	Year	Month	Day	Module ID	$R_0$ <sup>[1]</sup>	Coefficient A	Coefficient B	Constant Term C
Format	YYYY	MM	DD	XXXXX	Rxxxxxn or Rxxxxn <sup>[2]</sup>	$\pm X.XXXXXXXX$	$\pm X.XXXXXXXX$	$\pm X.XXXXXXXX$
Example	2020	11	25	00001	R100123n R99123n	-0.000000576	+0.000086780	+0.998188760
	If $R \geq 100n\Omega$ 2020112500001R100123n-0.000000576+0.000086780+0.998188760 If $R < 100n\Omega$ 2020112500001R99123n-0.000000576+0.000086780+0.998188760 <sup>[3]</sup>							

[1]  $R_0$ , the initial resistance of shunt at lab environment, usually at  $25^\circ\text{C} \pm 2^\circ\text{C}$ , in  $n\Omega$ .


[2] If  $R \geq 100\mu\Omega$ ,  $R_0$  is expressed as Rxxxxxn.

If  $R < 100\mu\Omega$ ,  $R_0$  is expressed as Rxxxxn.

[3] If  $R \geq 100\mu\Omega$ , the total number of characters is 57


If  $R < 100\mu\Omega$ , the total number of characters is 56

### 8.3 Connector

Manufacturer	Pin Count	Part #	Structural Diagram
Molex	4	5023520400	

[1] Recommended female connector: 5023510400.

### 8.4 Connector Definition

No.	Pin No.	Code	Description	Structural Diagram
1	Pin 1	T1	Temperature Sensor Pin 1	
2	Pin 2	S+	Current Signal Positive	
3	Pin 3	S-	Current Signal Negative	
4	Pin 4	T2	Temperature Sensor Pin 2	

[1] Refer to the recommended current direction in the PCB Structural Diagram.

[2] Recommend Pin1 and Pin4 as twisted pair. Pin2 and Pin3 as twisted pair.

### 8.5 PCB Structural Diagram

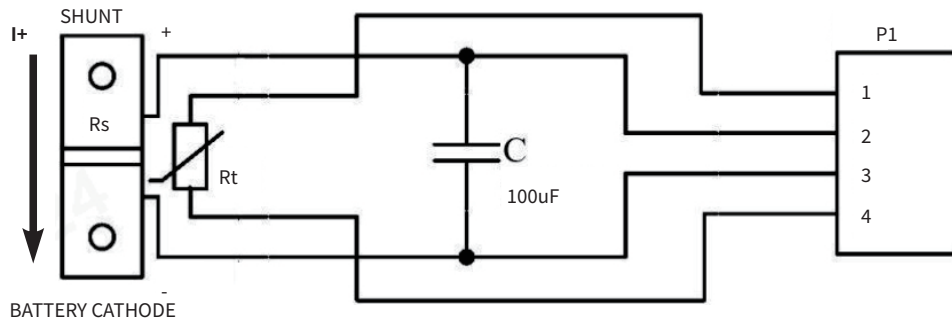


Figure 8-1. PCB Structural Diagram

[1] The direction of current is related to the installation position of the PCBS product in the BDU, and is not related to the PCBS itself.

[2] The positive and negative electrode of the PIN is determined by the direction of the current in the diagram.

[3] Generally, battery discharge is considered positive and charging is considered negative.

### 8.6 Copper Bar Connection

- Recommended Bolts: M6
- Recommended Torque: 8-10Nm
- Recommended Width \* Thickness of Copper Bar: 24mm\*3mm
- Recommended Length of Overlap between Shunt and Copper Bar: 20mm
- Do not use a flat washer between the copper bar and the shunt
- Keep the surface of shunt and copper bar clean and free of scratches

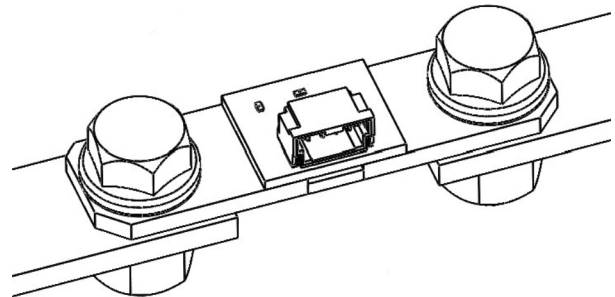


Figure 8-2. Diagram

## 9.Storage & Packaging

### 9.1 Storage

- Recommended storage at room temperature.
- The storage environment shall be clean, tidy, dry and free of harmful gases.  
The packaging case shall be protected from direct sunlight.
- Anti-static bracelet or gloves shall be worn during installation, storage and handling.

### 9.2 Packaging

#### 9.2.1 General Information

Packaging Element	Specifications	
SNP <sup>[1]</sup>	150	
Container	Carton	
Container Size	509*342*240	mm

[1] SNP, Standard Number of Package

#### 9.2.2 Auxiliary Materials Information

No.	Materials	Size L*W *H (mm)	Quantity	Recycle
1	50-Grid EPE Tray	496*328*61	3	No
2	EPE Tray Cover	495*325*5	4	No
3	Anti-Static PE Bag	900*510	1	No

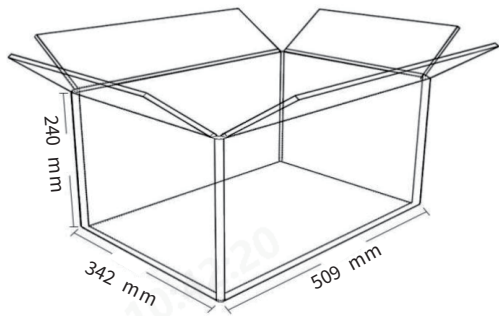


Figure 9-1. Carton Diagram

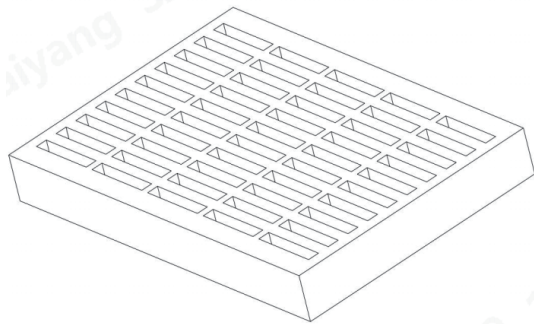


Figure 9-2. Structure Diagram of EPE

## Disclaimer

This disclaimer is applicable to the purchaser or user (hereinafter referred to as "user") of electronic products produced by Shenzhen C&B Electronic Co., Ltd. and its affiliated companies (hereinafter referred to as "C&B") or produced by a third party.

Unless individually stated in writing, the technical and reliability data (including datasheets), design resources (including reference designs), application or other design suggestions, network tools, security information and other resources related to this document provided by C&B are subject to change without notice. Users should check and obtain the latest relevant information before ordering C&B products, and verify whether the information is latest and complete.

C&B provides the information of this document "according to original product". C&B does not guarantee that there is no defect and does not make any express or implied warranty, including but not limited to merchantability, examples, implied meaning and typical value.

The information contained in this document is based on laboratory conditions, and the statement that the product is suitable for specific applications is based on the understanding of the typical requirements of C&B for general use. The characteristics and parameters of C&B Products in the user application may be different from those in the datasheet due to (i) the combination of C&B Products with other components in the user application, or (ii) the user application environment. The characteristics and parameters of C&B products may and do vary in different applications, and the actual performance may change over time. Users should always verify the actual performance of C&B products in their specific equipment and applications, and independently determine how many additional test margins should be added to their equipment or applications to fill the gap between the laboratory and the actual conditions.

The maximum value written in this document is that this product can withstand without damaging the product. However, due to approaching the maximum value or exceeding the maximum value, C&B cannot guarantee the electrical and mechanical characteristics of the product, and cannot ensure that the product can work normally under the absolute maximum rated value. Users of C&B shall run all necessary tests on the product and its application to avoid potential defects or failures of the product and application, or the product or application of the customer's third party customers. C&B shall not be liable for this.

This document does not convey or imply any license of trademarks, patents and any other intellectual properties. C&B shall not be liable for any infringement of intellectual property or other rights of third parties that may result from the application of this document and the use of the company's products.

To the maximum extent permitted by law, C&B will not assume (i) any and all liabilities for any special, punitive, consequential, incidental or indirect damages or loss of income or profit (including but not limited to savings losses, business interruption and other costs or rework costs related to the disassembly or replacement of any product), or (ii) any and all implied warranties, including implied warranties of fitness for a particular purpose, non-infringement and merchantability. Whether such loss is based on tort (including negligence) warranty, it can be used as the theoretical basis for breach of contract or any other law.

For any loss of customers caused by any reason, the total and cumulative liability of C&B to customers for the products described in this document is limited by the terms of the contract or agreement signed between C&B and users.

For any update of this document, please pay attention to the official website([www.resistor.today](http://www.resistor.today)).