

# HSHF

**NOTES:**

Rated Current: 5.0A  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 1500V AC/Minute  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -25℃ to +85℃

Insulator Material: PA66  
 Used with: WF3001-MT (Male Terminal)


## Ordering Information

WF 3001 - 2HK XX B 0 1

NeoRow No or plus Color Packing  
 Dual Row 01~12pin B=Black 0=PE Bag

**Specification & Ordering Information:**

Circuit	Part No.	Dimension			
		A	B	C	D
2X1	WF3001-2HK01B01	---	3.86	4.21	7.90
2X2	WF3001-2HK02B01	3.00	6.85	7.21	10.90
2X3	WF3001-2HK03B01	6.00	9.85	10.21	13.89
2X4	WF3001-2HK04B01	9.00	12.85	13.21	16.89
2X5	WF3001-2HK05B01	12.00	15.85	16.21	19.89
2X6	WF3001-2HK06B01	15.00	18.85	19.21	22.89
2X7	WF3001-2HK07B01	18.00	21.85	22.20	25.88
2X8	WF3001-2HK08B01	21.00	24.85	25.20	28.88
2X9	WF3001-2HK09B01	24.00	27.85	28.20	31.88
2X10	WF3001-2HK10B01	27.00	30.85	31.22	34.87
2X11	WF3001-2HK11B01	30.00	33.85	34.22	37.87
2X12	WF3001-2HK12B01	33.00	36.85	37.22	40.87

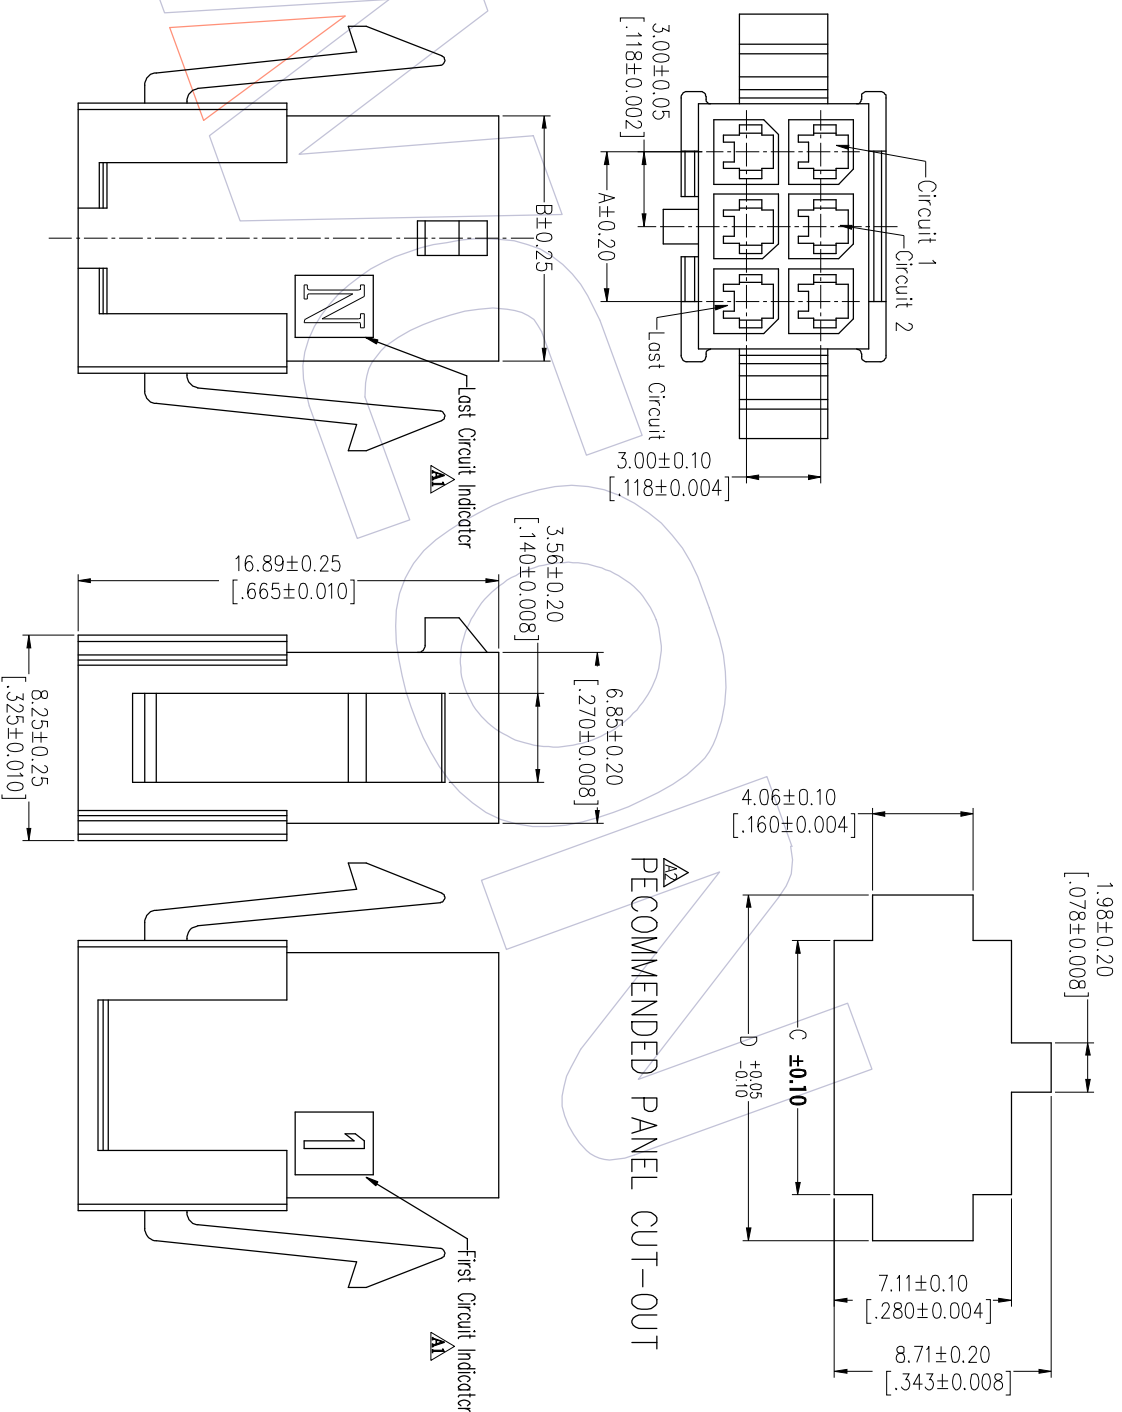

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2022/05/18	Update drawing	—
A1	2018/05/24	Add the drawing	—
AO	2012/09/20	NEW	—

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX ±0.40	GH	2022/05/18	UNIT	mm	SEE TAB
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/2	3.00mm DUAL ROW HOUSING
Angle ± 3°	PROJ.	DATE	PROJ.		Customer NO.
DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com