


Alchip™-MVH Series

- Lower ESR, Higher ripple current
- Endurance : 1,000 to 5,000 hours at 125°C
- Suitable to fit for automotive equipment
- Solvent resistant type except 63 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS Compliant




◆ SPECIFICATIONS

Items	Characteristics											
Category	-40 to +125°C											
Temperature Range	-40 to +125°C											
Rated Voltage Range	10 to 450V _{dc}											
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)											
Leakage Current	Rated voltage (V _{dc})	10 to 100V _{dc}					160 to 450V _{dc}					
	F60 to JA0	I=0.01CV or 3μA, whichever is greater.					I=0.04CV+100					
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater.										
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)												
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V	
	tan δ (Max.)	F60 to JA0	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10	—	—
		KE0 to MN0	0.22	0.18	0.16	0.14	0.12	0.14	—	0.10	0.20	0.24
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)												
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V	
	F60 to JA0	Z(-25°C)/Z(+20°C)	3	2	2	2	2	2	2	2	—	—
		Z(-40°C)/Z(+20°C)	6	4	4	3	3	3	3	3	—	—
	KE0 to MN0	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	—	2	3	6
Z(-40°C)/Z(+20°C)		8	6	4	3	3	3	—	3	6	10	
(at 120Hz)												
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified time at 125°C.											
	Time	F60 to H63 (10 to 100V _{dc}) : 1,000hours HA0 to JA0 (10 to 100V _{dc}) : 2,000hours KE0 to MN0 (10 to 100V _{dc}) : 5,000hours KE0 to MN0 (160 to 450V _{dc}) : 2,000hours										
	Capacitance change	≤ ±30% of the initial value										
	D.F. (tan δ)	≤300% of the initial specified value										
	Leakage current	≤The initial specified value										
	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for 400 to 450V _{dc}) at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.											
Shelf Life	Rated voltage(V _{dc})	10 to 50V _{dc}					63 to 450V _{dc}					
	Capacitance change	≤ ±30% of the initial value					≤ ±30% of the initial value					
	D.F. (tan δ)	≤300% of the initial specified value					≤300% of the initial specified value					
	Leakage current	≤The initial specified value					≤500% of the initial specified value					

◆ DIMENSIONS [mm]

- Terminal Code : A
- Size code : F60 to MN0

- Terminal Code : G(Vibration resistant structure)
- Size code : HA0 to MN0

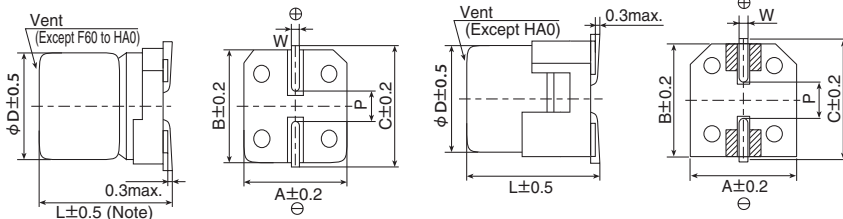


Note : L±0.3 for F60 and F80


⊘ : Dummy terminals

Size code	D	L	A	B	C	W	P
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆ PART NUMBERING SYSTEM

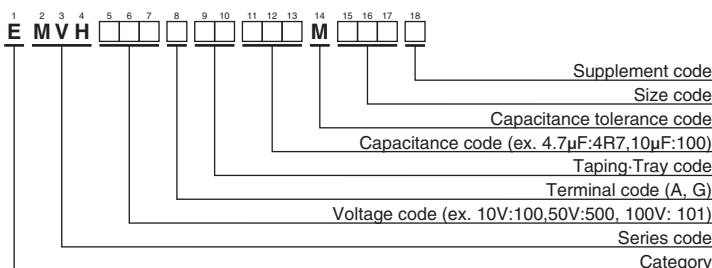

◆ MARKING

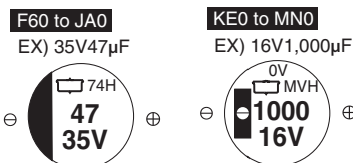

Please refer to "Product code guide (surface mount type)"



Alchip™ - MVH Series

◆STANDARD RATINGS

□ is not solvent resistant (63 to 450V_{dc}).

WV (V _{dc})	Cap (μF)	Size code	ESR (Ω max./ 100kHz)		Rated ripple current (mA rms/125°C)		Part No.	
			20°C	-40°C	100kHz	120Hz		
10	100	F80	0.90	14.0	110	—	EMVH100ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH100ADA101MH63G	
	220	F80	0.90	14.0	110	—	EMVH100ADA221MF80G	
	220	H63	0.90	14.0	110	—	EMVH100ADA221MH63G	
	220	HA0	0.40	6.0	220	—	EMVH100□DA221MHA0G	
	330	HA0	0.40	6.0	220	—	EMVH100□DA331MHA0G	
	330	JA0	0.30	4.5	296	—	EMVH100□DA331MJA0G	
	470	JA0	0.30	4.5	296	—	EMVH100□DA471MJA0G	
	1,000	KE0	0.14	2.1	750	—	EMVH100□RA102MKE0S	
	2,200	LH0	0.10	1.5	1,000	—	EMVH100□DA222MLH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH100□DA222MMH0S	
	3,300	MH0	0.10	1.5	1,200	—	EMVH100□DA332MMH0S	
4,700	MN0	0.058	0.87	1,550	—	EMVH100□DA472MMN0S		
16	47	F60	1.6	24.0	69	—	EMVH160ADA470MF60G	
	100	HA0	0.40	6.0	220	—	EMVH160□DA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH160□DA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH160□DA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH160□DA331MJA0G	
	470	KE0	0.14	2.1	750	—	EMVH160□RA471MKE0S	
	680	KE0	0.14	2.1	750	—	EMVH160□RA681MKE0S	
	680	LH0	0.10	1.5	1,000	—	EMVH160□DA681MLH0S	
	1,000	MH0	0.10	1.5	1,200	—	EMVH160□DA102MMH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH160□DA222MMH0S	
25	33	F60	1.6	24.0	69	—	EMVH250ADA330MF60G	
	47	F80	0.90	14.0	110	—	EMVH250ADA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH250ADA470MH63G	
	100	F80	0.90	14.0	110	—	EMVH250ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH250ADA101MH63G	
	100	HA0	0.40	6.0	220	—	EMVH250□DA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH250□DA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH250□DA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH250□DA331MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH250□RA331MKE0S	
	470	KE0	0.14	2.1	750	—	EMVH250□RA471MKE0S	
	470	LH0	0.10	1.5	1,000	—	EMVH250□DA471MLH0S	
	680	LH0	0.10	1.5	1,000	—	EMVH250□DA681MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH250□DA681MMH0S	
	1,000	MN0	0.058	0.87	1,550	—	EMVH250□DA102MMN0S	
35	10	F60	1.6	24.0	69	—	EMVH350ADA100MF60G	
	22	F60	1.6	24.0	69	—	EMVH350ADA220MF60G	
	33	F80	0.90	14.0	110	—	EMVH350ADA330MF80G	
	33	H63	0.90	14.0	110	—	EMVH350ADA330MH63G	
	47	F80	0.90	14.0	110	—	EMVH350ADA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH350ADA470MH63G	
	47	HA0	0.40	6.0	220	—	EMVH350□DA470MHA0G	
	100	HA0	0.40	6.0	220	—	EMVH350□DA101MHA0G	
	100	JA0	0.30	4.5	296	—	EMVH350□DA101MJA0G	
	220	JA0	0.30	4.5	296	—	EMVH350□DA221MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH350□RA331MKE0S	
	330	LH0	0.10	1.5	1,000	—	EMVH350□DA331MLH0S	
	470	KG5	0.11	1.5	900	—	EMVH350□RA471MKG5S	
	470	LH0	0.10	1.5	1,000	—	EMVH350□DA471MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH350□DA681MMH0S	
	50	10	F60	2.8	42.0	51	—	EMVH500ADA100MF60G
		10	H63	1.6	30.0	83	—	EMVH500ADA100MH63G
		22	F80	2.0	30.0	83	—	EMVH500ADA220MF80G
22		H63	1.6	30.0	83	—	EMVH500ADA220MH63G	
50	33	F60	1.6	24.0	69	—	EMVH500ADA330MF60G	
	47	F80	0.90	14.0	110	—	EMVH500ADA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH500ADA470MH63G	
	100	F80	0.90	14.0	110	—	EMVH500ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH500ADA101MH63G	
	100	HA0	0.40	6.0	220	—	EMVH500□DA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH500□DA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH500□DA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH500□DA331MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH500□RA331MKE0S	
	470	KE0	0.14	2.1	750	—	EMVH500□RA471MKE0S	
	470	LH0	0.10	1.5	1,000	—	EMVH500□DA471MLH0S	
	680	LH0	0.10	1.5	1,000	—	EMVH500□DA681MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH500□DA681MMH0S	
	1,000	MN0	0.058	0.87	1,550	—	EMVH500□DA102MMN0S	
	80	10	HA0	0.75	50.0	70	—	EMVH800□DA100MHA0G
		22	HA0	0.75	50.0	70	—	EMVH800□DA220MHA0G
		22	JA0	0.55	35.0	115	—	EMVH800□DA220MJA0G
33		HA0	0.75	50.0	70	—	EMVH800□DA330MHA0G	
33		JA0	0.55	35.0	115	—	EMVH800□DA330MJA0G	
47		JA0	0.55	35.0	115	—	EMVH800□DA470MJA0G	
100		HA0	0.75	50.0	70	—	EMVH101□DA100MHA0G	
22		HA0	0.75	50.0	70	—	EMVH101□DA220MHA0G	
22		JA0	0.55	35.0	115	—	EMVH101□DA220MJA0G	
100	33	JA0	0.55	35.0	115	—	EMVH101□DA330MJA0G	
	47	KE0	0.33	16.5	450	—	EMVH101□RA470MKE0S	
	68	KG5	0.26	13.0	550	—	EMVH101□RA680MKG5S	
	100	LH0	0.24	12.0	650	—	EMVH101□DA101MLH0S	
	220	MN0	0.16	8.0	950	—	EMVH101□DA221MMN0S	
	10	KE0	—	—	—	100	EMVH161□RA100MKE0S	
	22	LH0	—	—	—	180	EMVH161□DA220MLH0S	
	33	MH0	—	—	—	245	EMVH161□DA330MMH0S	
160	68	MN0	—	—	—	380	EMVH161□DA680MMN0S	
	10	KE0	—	—	—	100	EMVH201□RA100MKE0S	
	22	LH0	—	—	—	180	EMVH201□DA220MLH0S	
	33	LN0	—	—	—	250	EMVH201□DA330MLN0S	
	33	MH0	—	—	—	245	EMVH201□DA330MMH0S	
	47	MN0	—	—	—	315	EMVH201□DA470MMN0S	
200	10	KG5	—	—	—	110	EMVH251□RA100MKG5S	
	22	LN0	—	—	—	200	EMVH251□DA220MLN0S	
	22	MH0	—	—	—	205	EMVH251□DA220MMH0S	
250	33	MN0	—	—	—	260	EMVH251□DA330MMN0S	
	4.7	KE0	—	—	—	70	EMVH401□RA47R7MKE0S	
	6.8	LH0	—	—	—	100	EMVH401□DA68R8MLH0S	
400	10	LN0	—	—	—	140	EMVH401□DA100MLN0S	
	10	MH0	—	—	—	135	EMVH401□DA100MMH0S	
450	3.3	KG5	—	—	—	65	EMVH451□RA3R3MKG5S	
	4.7	LH0	—	—	—	85	EMVH451□DA47R7MLH0S	
10	MN0	—	—	—	145	EMVH451□DA100MMN0S		

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Rated voltage (V _{dc})	Size code	Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
10 to 100	F60 to JA0	10		0.66	0.86	0.93	1.00
		22 to 470		0.93	0.97	1.00	1.00
		47 to 100		0.40	0.75	0.90	1.00
	KE0 to MN0	220 to 470		0.50	0.85	0.94	1.00
		680 to 1,000		0.60	0.87	0.95	1.00
		2,200 to 3,300		0.75	0.90	0.95	1.00
		4,700		0.85	0.95	0.98	1.00
160 to 450	KE0 to MN0	3.3 to 33		1.00	1.50	1.75	1.80
		47 to 68		1.00	1.30	1.40	1.50

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.